

KVK Insulated duct fans

Insulated radial fan for limited spaces



- Design for limited installation height
- Very low noise, acoustic and thermal insulation
- Corrosion resistance of casing C4
- Indoor and outdoor installation
- Easy maintenance, service cover

[Find more details in our online catalogue](#)

Flexibility

The KVK Silent fans **combine** a high efficient **fan** and **casing** with perfect **acoustic** and **thermal** insulation capacity. The KVK Silent fans are intended to use for **supply** or **extract** air, designed to be installed in **any position**. This ensures that the fans can be used in a variety of **commercial and domestic** applications.

Reliability

Construction of casing and thermal insulation permits **outdoor** and **indoor** use. The combination of reliable casing and motor construction ensures to minimize the need for maintenance of the fans and allows long **continuous operation**. Thanks to service lid it is **easy to clean**.

Performance

High performance impeller together with **high efficient** external rotor motor are designed to ensure high-level performance to **minimize power consumption** and **maximize efficiency**.

Noise

Partly or **fully insulated** casing (depends on model) is perfectly designed to **reduce noise** mainly to **surrounding** and partly to **inlet/outlet**.

Features

Construction

Casing of all KVK fans made of **AluZinc 185**, corrosion **class C4**.

KVK Slim has acoustically/thermally **insulated lid**. **KVK Silent** has acoustically/thermally **insulated lid and casing**. Insulation made of **rockwool** and has surface liner that prevents the migration of fibers into the airstream.

Casing has connection **spigot** with **rubber seals** and is equipped with an external **terminal box** with protection class **IP54**.

Impeller

KVK Slim/Silent fans use backward curved **radial** impeller. These are from lightweight, hard-wearing fiberglass reinforced **polyamide** (for sizes up to 250) or reinforced **polypropylene**, dynamically **balanced** and paired with corresponding external rotor motors.

Motor

Depending on type, fans are equipped with **AC** or high efficient **EC** external rotor motors. All motors are suitable for **50Hz** and **60Hz**.

Motor protection

Sizes **100-315 mm** with **AC** motors have **integrated** thermal protection with manual (electrical) reset.

Sizes **355-500 mm** with **AC** motors have prewired integral **thermal contacts TK** with leads to external **motor protection device**.

Fans with **EC** motors have an **integrated** electronic **thermal protection**, including **locked-rotor protection** and **soft-start**.

Control

EC motor with **built-in potentiometer** to adjust working point can be also controlled by external **signal 0-10V**.

AC motor can be controlled by **5-step** or **stepless** speed regulator.

KVK fans can be **demand controlled** via additional accessories like sensors and controllers for CO₂, temperature, humidity, presence indication and VAV.

Installation

KVK Slim/Silent fans can be installed in any position **indoor** and **outdoor**. Circular spigot with rubber seals is perfectly designed to connect to the duct by using **fast clamps preventing vibration** to the duct. A service cover with screw connection and hinges with pins make cleaning and service easy.

Technical parameters

Nominal data

Voltage (nominal)	230	V
Frequency	50	Hz
Phases	1~	
Input power	68	W
Input current	0.577	A
Impeller speed	3,512	rpm
Air flow	max 329	m³/h
Temperature of transported air	max 60	°C
Max temperature of transported air, when speed controlled	60	°C

Sound data

Sound pressure level at 3m (20m² Sabin)	43	dB
---	----	----

Protection/Classification

Enclosure class, motor	IP54
Insulation class	B

Data according to ErP

Energy class, Basic unit	C
Energy class, Local demand	F
ErP ready	ErP 2016; ErP 2018

Dimensions and weights


Duct dimension; Circular, inlet	100	mm
Duct dimension; Circular, outlet	100	mm
Weight	13.7	kg

Others

Duct connection type	Circular
Motor type	EC

Performance

Performance curve

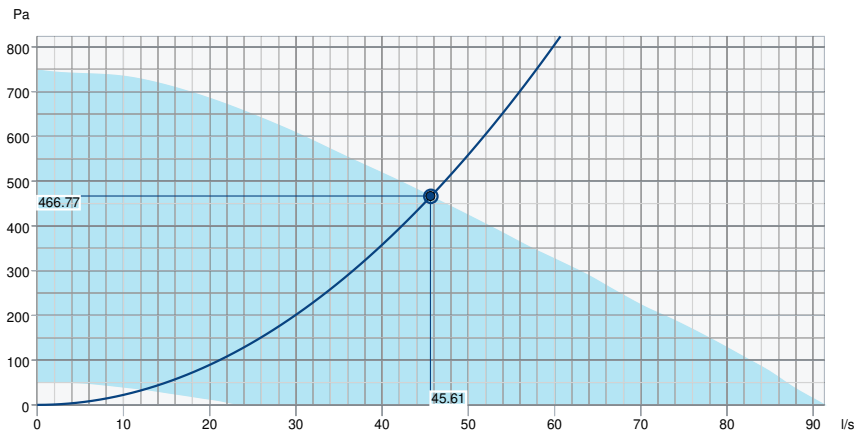

Hydraulic data

Required air flow	45.65 l/s
Required static pressure	466 Pa
Working air flow	45.61 l/s
Working static pressure	467 Pa
Air density	1.204 kg/m ³
Power	67.0 W
Fan control - RPM	3,518 rpm
Current	0.60 A
SFP	1.469 kW/m ³ /s
Control voltage	10.0 V
Supply voltage	230 V

Sound power level		63	125	250	500	1k	2k	4k	8k	Total
Inlet	dB(A)	52	53	52	51	48	49	47	45	60
Outlet	dB(A)	53	60	66	68	66	63	55	48	73
Surrounding	dB(A)	24	31	34	42	39	44	46	42	50
Sound pressure level at 3m (20m ² Sabine)	dB(A)	-	-	-	-	-	-	-	-	43
Sound pressure level at 3m free field	dB(A)	-	-	-	-	-	-	-	-	29


Accessories

Ecodesign


Product		
Trade name	Systemair	
Product name	KVK Silent 100 EC	
Basic unit		
ErP compliance	2016	
SEC Average	-8	kWh/(m².a)
SEC Cold	-24.4	kWh/(m².a)
SEC Warm	1.4	kWh/(m².a)
SEC Class	F	
Unit category	RVU	
Unit type	UVU	
Drive	Integrated VSD	
Temperature ratio (UVU)	Not applicable	
qv max	293	m³/h
P max	68	W
Sound power (LWA)	36	dB(A)
qv ref	0.0569	m³/s
Ps ref	50	Pa
SPI	0.133	W/(m³/h)
CTRL	0.65	
MISC	1.1	
x-value	2	
External Leakage	0.2	%
External Leakage	Not applicable	
AEC average	368	kWh
AHS Cold	368	kWh
AEC warm	368	kWh
AHS Average	17	kWh/a
AHS Cold	34	kWh/a
AHS Warm	8	kWh/a

Units with local demand control		
ErP compliance	2018	
SEC Average	-24.4	kWh/(m².a)
SEC Cold	-51.5	kWh/(m².a)
SEC Warm	-8.9	kWh/(m².a)
SEC Class	C	
Unit category	RVU	
Unit type	UVU	
Drive	Integrated VSD	
Heat recovery type	None	
Temperature ratio (UVU)	Not applicable	
qv max	293	m³/h
P max	68	W
Sound power (LWA)	36	dB(A)
qv ref	0.0569	m³/s
Ps ref	50	Pa
SPI	0.133	W/(m³/h)
CTRL	0.65	
MISC	1.1	
x-value	2	
External Leakage	0.2	%
External Leakage	Not applicable	
AEC average	155	kWh
AEC cold	155	kWh
AEC warm	155	kWh
AHS Average	28	kWh/a
AHS Cold	55	kWh/a
AHS Warm	155	kWh/a

Dimension

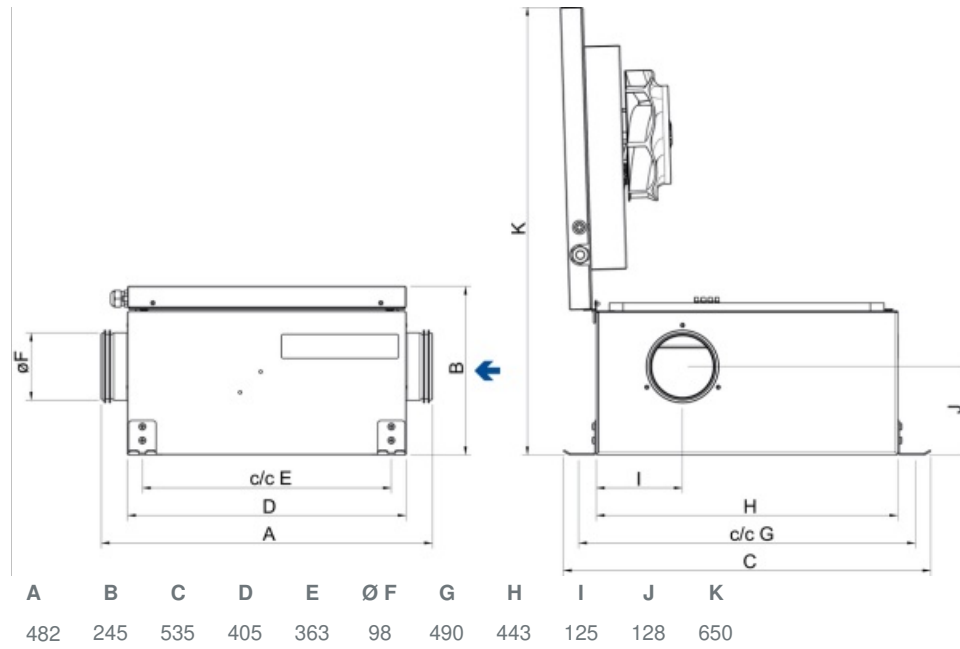


Wiring

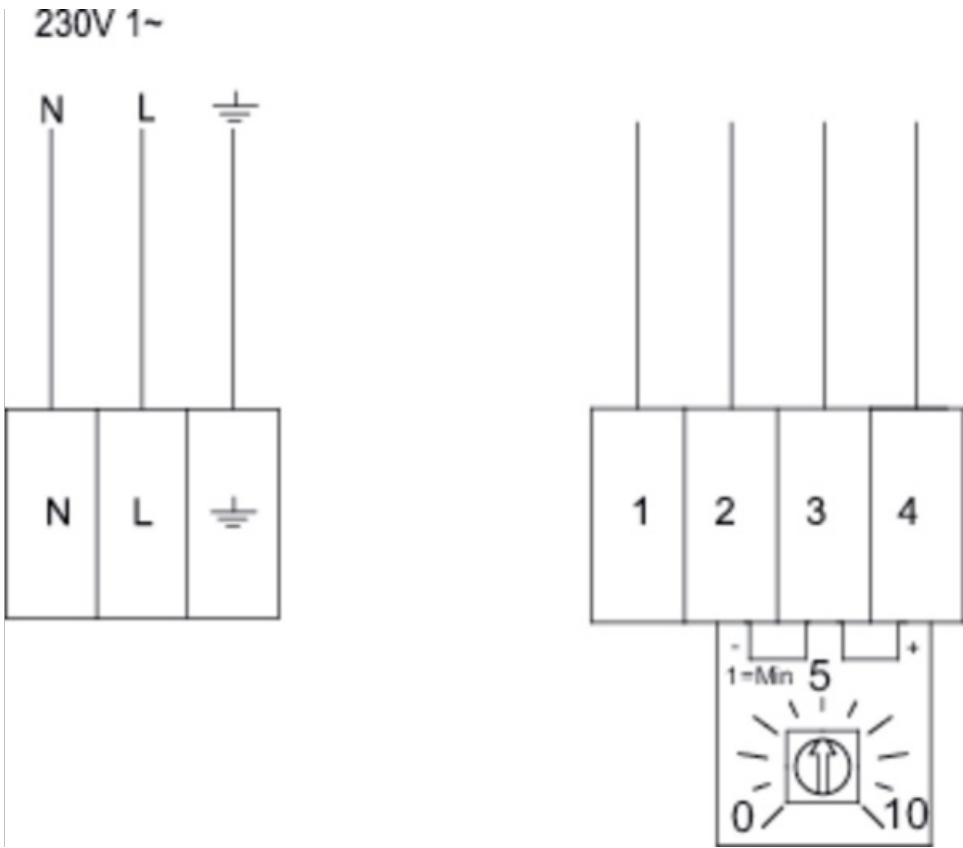


Terminal	Cable	Description
1	White	Tacho output, Isink max 10mA
2	Blue	GND
3	Yellow	Control input 0-10 VDC/PWM
4	Red	Output 10 VDC max 1.1 mA

Energy class label

Energy class, Basic unit

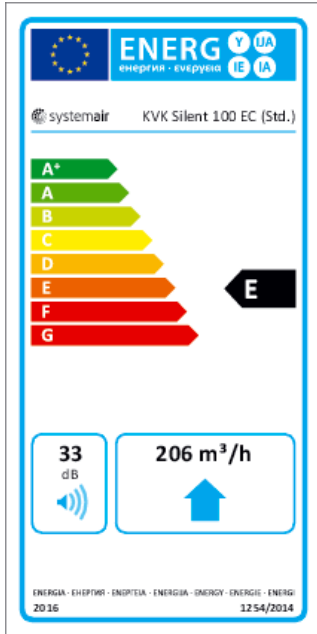

Energy class, Local demand

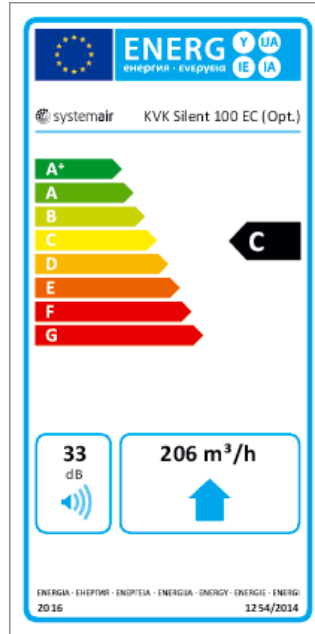

Accessories

- CXE/AVC Modbus (37256)
- EC-Basic-H humidity (24807)
- EC-Basic-U universal 0-10V (24806)
- EC-Vent control board (3115)
- MTP 10, 10K, Speed control (32731)
- Potentiometer MTP 20, 0-10V (310220)
- SG 100 Protection guard (5606)
- VKK-100 Back draft damper (1623)
- HR1 Room Humidistat (215150)
- Presence detector/IR24-P (6995)
- Safety switch 2-pole grey (210679)
- CB 100-0,6 230V/1 Duct heater (5376)
- CWK 100-3-2,5 Duct cooler,circ (30019)
- FGR 100 Filter cassette (1802)
- LDC 100-1200 Silencer (5996)
- LDC 100-600 Silencer (5188)
- RSK-100 Back draft damper (5597)
- THS 160 Hood w.cover pl. black (1839)
- VBC 100-3 Water heating batt (9838)
- VK-10 Louvre shutter (87682)
- EC-Basic-CO2 and temperature (24808)
- EC-Basic-T temperature (24805)
- EC-Selector (9908)
- EC-Vent Room Unit (3018)
- MTV-1/010 Controller 0..10V+ (30650)
- REV-3POL/03-7,5kW R/Y (33978)
- Step switch S-5EC, 0-10V (76738)
- CO2RT-R-D Transmitter (6993)
- IGK-100 Wall Grid (1630)
- RT 0-30 Room Thermostat (5151)
- CB 100-0,4 230V/1 Duct heater (5288)
- CBM 100-0,6 230V/1 Duct heater (5479)
- FFR 100 Filter cassette (1766)
- FK 100 Fast clamp (1607)
- LDC 100-300 Silencer (8180)
- LDC 100-900 Silencer (5189)
- THB 160 Hood w.cover pl. black (1764)
- VBC 100-2 Water heating batt (5456)
- VBF 100 Water heating battery (1724)
- Room hygrostat HR-S (286251)

Documents

- INSTALLATION__OPERATION_AND_MAINTENANCE_INSTRUCTION_KV_DUO__KVK_DUO__KVK_003__EN.PDF
- COMMISSIONING_RECCORD_FANS__EN.PDF