


HERU 300 S EC



- Model with side connections.
- Designed for supply and exhaust air ventilation with energy recovery.
- Suitable for installation in apartments, small houses, offices and other premises where there are stringent requirements on the indoor environment.
- High temperature efficiency, low energy consumption (SFP), low sound level, high operating reliability and provides clean indoor air.
- Unique design minimizes all thermal bridges.
- Easy to handle with a wireless IQ CONTROL with 4,3" touch display for operation and monitoring.
- Integrated Modbus communication. No accessories needed.
- App controlled via cloud service.
- Easy installation wizard.
- Scheduled operation.
- Supports use of presence sensors.
- Airflow is generated by two silent radial fans with EC motors and impellers with backward curved blades.
- The fans are connected using quick connectors and are very easy to remove for cleaning.
- A regenerative, non-hygroscopic, aluminum rotating heat exchanger located in the center of the unit. The heat exchanger can easily be removed for cleaning.
- Delivered with bag filter ISO ePM1 65% as standard, for both extract and supply air. The filters are very easy to change.
- Integrated controls for heating/cooling. Increases thermal comfort by heat recovery or night cooling.
- Integrated electric heater.
- The interior of the unit is constructed of galvanized steel sheet. The exterior is made of galvanized and Galfan steel sheet. Exterior corrosivity class C3.
- 50 mm insulation.
- For placement in warm or cold areas.
- Comes in right-hand design as standard, but can easily be rebuilt to left-hand design.
- HERU 100S and HERU 160S are equipped with wall plug. HERU 200S and HERU 300S comes with cable for fixed installation.

NOTE! The warranty of HERU is only valid if accessories/equipment (e.g. filters) from H. Östberg AB are used.


DIAGRAMS - SUPPLY

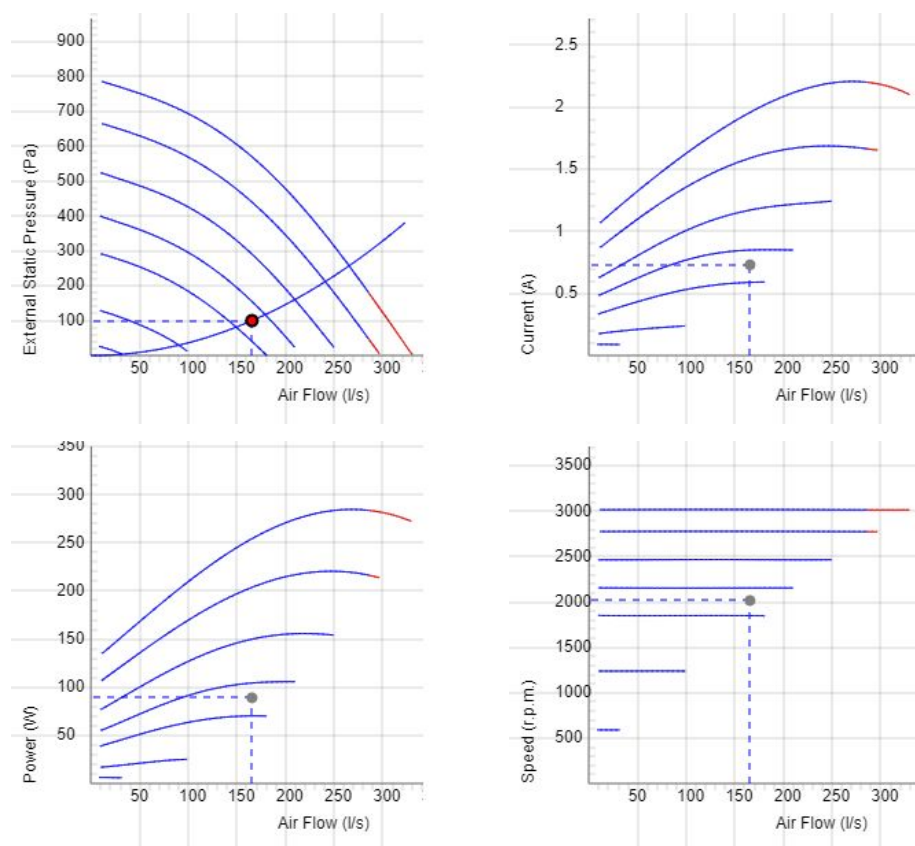

Data - SUPPLY

Air Flow (l/s)	External static pressure (Pa)	Power (W)	Speed (r.p.m.)	Current (A)	Voltage (V)
166	100	89.1	2016	0.73	6.54



DIAGRAMS - EXTRACT

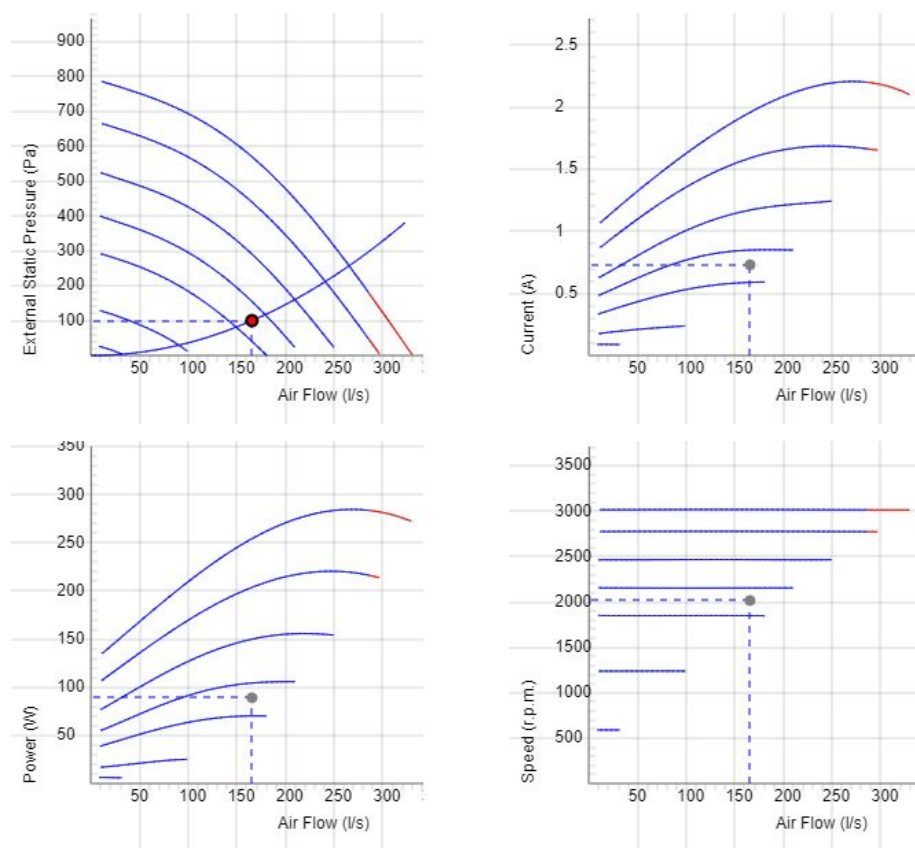

Data - EXTRACT

Air Flow (l/s)	External static pressure (Pa)	Power (W)	Speed (r.p.m.)	Current (A)	Voltage (V)
166	100	89.1	2016	0.73	6.54

DIAGRAMS - COMBINED

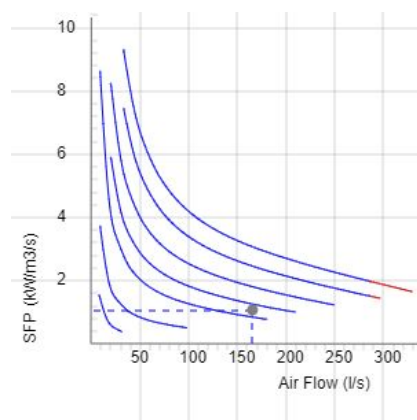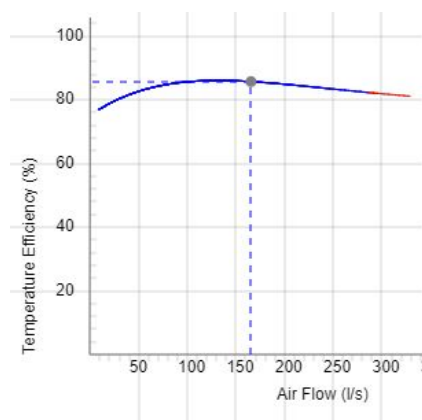


DATA COMBINED

Efficiency (%)
85.7

SFPv (kW/m³/s)
1.07

SOUND DATA

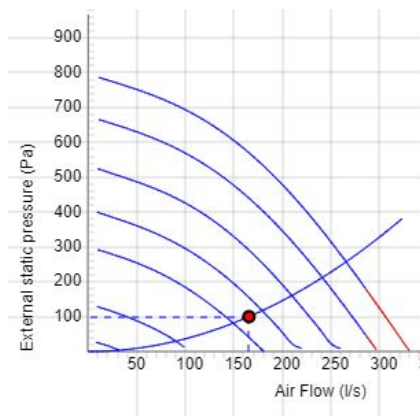

	Tot	63	125	250	500	1k	2k	4k	8k
Supply Lw dB(A)	73	50	54	63	68	67	67	60	53
Extract Lw dB(A)	57	43	48	53	53	43	39	30	12
Surrounding Lw dB(A)	44	39	37	36	33	29	26	27	27
Surrounding Lp dB (A)	37								
20m² Sabine, hemispherical 3m									

Data - SOUND

Air Flow (l/s)	External static pressure (Pa)	Power (W)	Speed (r.p.m.)	Current (A)	Efficiency (%)	SFPv (kW/m³/s)	Voltage (V)
166	100	89.1	2016	0.73	85.7	1.07	6.54

TECHNICAL DATA

HERU 300 S EC-y1 8010787


Parameter	Value	Unit
Voltage	230	V
Phase	1-2	~
Frequency	50	Hz
Power	2890	W
Power, fans	573	W
Power, heater	2300	W
Current	14.5	A
Current, fans	4.4	A
Current, heater	10.0	A
Speed	3020	r.p.m.
Sound pressure level at 3 m	43	dB(A)
Weight	105	kg
Weight (empty casing)	53.6	kg
Enclosure class	41	IP
Duct connection	250	mm
Max. flow @ 0Pa	331	l/s
Max. pressure	797	Pa
Voltage range	220-240	V

PRODUCT INFORMATION SHEET


Parameter	Value	Unit
(a) Manufacturer	Östberg	-
(b) Model code	HERU 300 S EC	-
(c) SEC average climate	-41.8	kWh/m ²
SEC average climate, class	A	-
SEC warm climate	-16.7	kWh/m ²
SEC warm climate, class	E	-
SEC cold climate	-85.7	kWh/m ²
SEC cold climate, class	A+	-
(d) Declared type	RVU / BVU	-
(e) Type of drive	Variable speed drive	-
(f) Type of heat recovery	Regenerative	-
(g) Thermal efficiency	85	%
(h) Max. flow rate (@100Pa)	997	m ³ /h
(i) Power at max. flow rate	457	W
(j) Sound power level	45	dB LwA
(k) Reference flow rate	0.194	m ³ /s
(l) Reference pressure difference	50	Pa
(m) SPI	0.31	W/(m ³ /h)
(n) Type of control/ctrl factor	Local demand control(accessory)/0.65	-
(o) External (and internal) leakage rate	1.99 (3.99)	%
(p) Mixing rate	N/A	-
(q) Visual filter warning	In remote control	-
(r) Instruction supply/exhaust grilles	See manual	-
(s) Disassembly instructions	fsp.ostberg.com	-
(t) Airflow sensitivity	N/A	-
(u) Air tightness	N/A	m/s
(v) AEC	162	kWh

Parameter	Value	Unit
(w) AHS average	4590	kWh
AHS warmer	2075	kWh
AHS colder	8979	kWh


DIMENSIONS

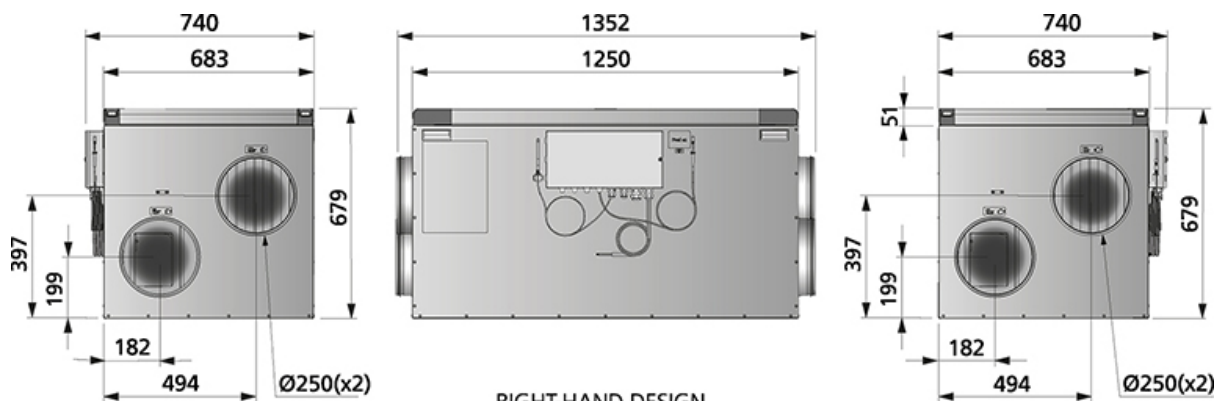

RIGHT-HAND DESIGN

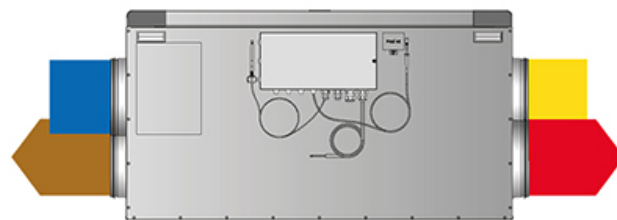

LEFT-HAND DESIGN

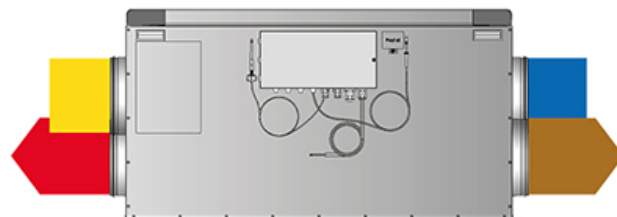

ENGLISH

- Supply air
- Extract air
- Exhaust air
- Fresh air

SVENSKA

- Tilluft
- Frånluft
- Avluft
- Uteluft

NORSKA

- Tilluft
- Avtrekk
- Avkast
- Luftinntak

SUOMI

- Tuloilma
- Poistoilma
- Jäteilma
- Ulkoilma

DEUTSCH

- Zuluft
- Abluft
- Fortluft
- Frischluft

POLSKI

- Powietrze nawiew
- Powietrze wywiew
- Powietrze usuwane
- powietrze z zewnątrz

ITALIANO

- Aria di immissione
- Aria di estrazione
- Sfiato
- Aria di esterna

ACCESSORIES

Mechanical accessories



Outside wall hood
250



Filter Kit HERU
200/300 S NextGen



Floor stand HERU
200/300 S



Novibra Mat



Silencer LDC 250

Electrical accessories



IQC Touch display



Active dock holder
IQC



Firmware HERU IQC
v1.10



Extension cable,
antenna IQC



HERU IQ App



Pressure control IQC



Heater Kit Water,
HERU 200/300 S
NextGen



HERU 200/300 S/T
IQC Water Cooler



Room temperature
sensor



Humidity/temperature
sensor



Carbon dioxide
sensor CO2



Duct sensor



Damper motor